


Sys*Stim[®] 208A Specifications

General Specifications:

Input:	100 to 240 Volt AC 50/60 Hz, 0.75 Amp (max)
External Fuse:	0.75 A, 250 V, Slow Blow
Weight:	1.5 pounds
Dimensions:	2.75 in (H) x 6.1 in (D) x 8 in (L)
Maximum Treatment Time:	60 minutes

Output Specifications:

Channels:	Two
Waveform:	Asymmetrical biphasic with zero net DC
Voltage:	110 V Peak into a 1k ohm load 28 V Peak into a 100 ohm load
Intensity:	56 μ C Max per Pulse into a 100 ohm load
Phase Duration:	200 μ S @ 50% Max Amplitude
Frequency:	Pulse Mode: 1-80 Hz Tetanize Mode: 80 Hz Surge Mode: 80 Hz Recip. Mode 80 Hz
Surge Cycle:	0.5 On/Off to 3.75 On/Off
Recip. Cycle:	0.5 CH1/CH2 to 3.75 CH1/CH2

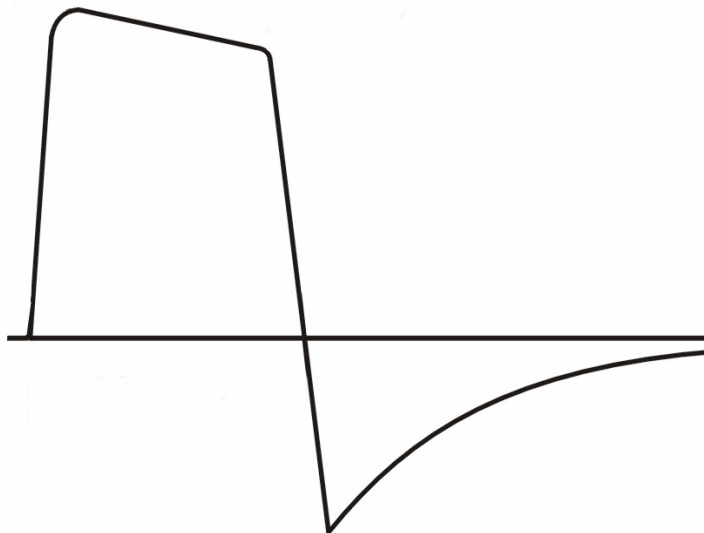

Stimulation Waveform Illustration