

### The Sonicator® Plus 930 Combo

Introducing a hot new combo that performs muscle stimulation *and* therapeutic ultrasound. The exciting new Sonicator Plus 930 features a 1-and 3-MHz, 5 cm<sup>2</sup> applicator for therapeutic ultrasound, plus the three most popular stim waveforms—Interferential, Premodulated and Medium Frequency (Russian).

In one compact package, the Sonicator Plus 930 gives you:


Independent control of up to three treatment protocols

- Two intensity controls and two intensity displays, enabling the operator to monitor all aspects of a treatment simultaneously
- An easy-to-use membrane panel designed for quick set-up and simple operation
- A convenient recessed cradle that holds the ultrasound applicator between treatments

So contact Mettler Electronics today at 800-854-9305 to learn more about the value-priced Sonicator Plus 930. In one console, you get muscle stimulation *plus* therapeutic ultrasound. And all that jazz.



## THE SONICATOR® PLUS 930 COMBO

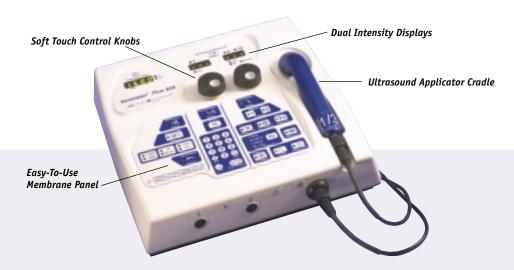

# THE RIGHT COMBINATION OF PERFORMANCE AND VALUE.

The value-priced Sonicator Plus 930 combines a wealth of important features for the busy practice. Therapeutic ultrasound is provided by a 1- and 3-MHz, 5 cm<sup>2</sup> applicator with unique direct crystal-to-patient contact. And muscle stimulation is delivered in a choice of three waveforms—Interferential, Premodulated, and Medium Frequency (Russian stimulation).

The Sonicator Plus 930 is also remarkably easy to set up and use. To start a treatment, just select treatment parameters with as few as three keystrokes. Then adjust the intensity with a twist of the dial.

Impressive performance capabilities, outstanding simplicity of design—that's the Sonicator Plus 930. Dollar for dollar, no one gives you more than Mettler.



The model 93 or 94 cart offers a sturdy treatment platform for heavy clinical use.



The economical model 73 cart includes 3 shelves to accommodate Mettler units and accessories.

#### **General Specifications:**

Input:	90-240 VAC, 50-60 Hz
ETL and C-ETL Listed:	Model ME 930 (9801427)
Weight:	8.7 pounds
Dimensions:	6 in (H) x 12 in (W) x 12 in (D)
Warranty:	2 year limited

#### **Ultrasound Specifications:**

Effective Radiating Area:	5 cm <sup>2</sup>
Frequency:	1.0 MHz
	3.2 MHz
Modes:	Continuous
	Pulsed, 20%
Maximum Output Power:	11 W
Maximum Intensity:	2.2 W/cm <sup>2</sup>

#### **Stimulation Specifications:**

Waveforms:	Interferential, Premodulated, Medium
	Frequency (Russian)
Output:	Interferential, 0-65 mA RMS, 1 kOhm load
	Premodulated, 0-50 mA RMS, 1 kOhm load
	Medium Frequency, 0-50 mA RMS, 1 k0hm load
Frequency:	Interferential, 4000 Hz, 0-250 Hz
	Premodulated, 4000 Hz, 1-250 Hz
	Medium Frequency, 2500 Hz, 50 Hz
Output Options:	Continuous, Vector Rotation, Surge, Reciprocation



Mettler Electronics Corp., 1333 S. Claudina St., Anaheim CA 92805 U.S.A. (800) 854-9305 Department J Fax (714) 635-7539 Tel. (714) 533-2221 http://www.mettlerelec.com



